


RUBBAIR DOOR

ultra-lite™ model

Specifications: 1 3/4" insulated, Semi-flexible

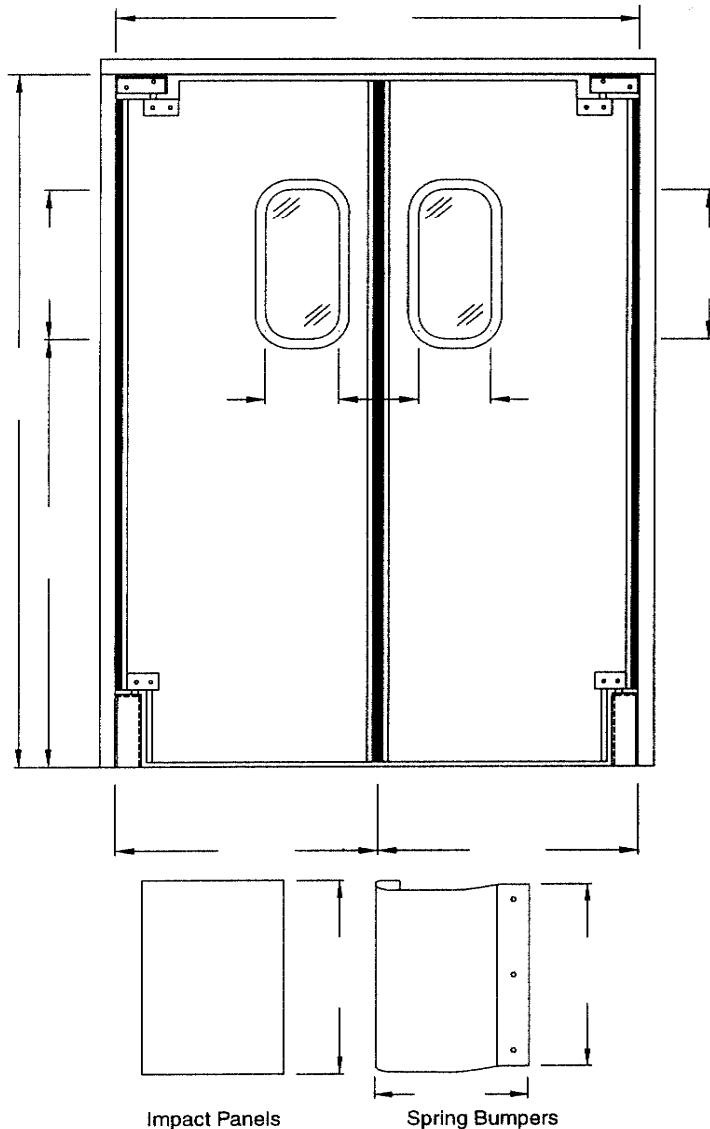

<p>SPECIAL OPTIONS / NOTES</p> <p>_____</p> <p>_____</p> <p>_____</p> <p>_____</p>
<p>APPROXIMATE WEIGHT</p> <p>3.5 lbs. per sq. ft. X _____ sq. ft. = _____ lbs.</p>
<p>Approved: _____ Date: _____</p>

Order Number: _____

Date: ____ / ____ / ____

Sold To: _____

PO #: _____

Job Name: _____

Ship Week of: ____ / ____ / ____

Quantity: _____ Pair / Single

Net Opening: _____" Wide _____" High

COLOR SELECTION (Circle one)
 Cloud Gray, Charcoal Gray, Black, Cadet Blue,
 Cocoa, Chocolate, Beige, Red, Burgundy, White,
 Royal Blue, Green

DOOR FEATURES & OPTIONS

SPRING BUMPERS

24" Wide	42" Wide
[]	[] 12" High
[]	[] 18" High
[]	[] 24" High
[]	[] 36" High
[]	[] 48" High

IMPACT PANELS

[] Vinyl _____"High

[] ABS _____"High

[] 18 ga. Stainless Steel _____"High

LOWER HINGE

8 3/4" High Stainless Steel Jamb Guard is standard with E Z Hang Hinge

[] Combo Bottom Bearing/Jamb Guard

[] Standard Bottom Bearing

WINDOW SIZES (Dual Pane)

10 1/2" x 23" is standard

[] 7" x 10"

[] 11 1/2" x 15 1/2"

[] 14" x 16"

[] 16" x 18"

[] 24" x 24"

SEALS

Full Perimeter Gasketing is standard

[] Jamb & Header Seal Only

V-CAM OPTION (In Place of EZ Hang Hinge)

[] 3/4" Rise 90° x 90°

INSTALLATION ACCESSORIES

[] Aluminum Frame

Build rough opening 1 1/4" wider and 5/8" taller than doors to accommodate frames.

[] 2" x 6" Tubular Steel Frame, KD

Build rough opening 4 1/2" wider and 2 1/4" taller than doors to accommodate frames.

JAMB CONSTRUCTION

E Z Hang hinge requires a minimum double 2x4 wood jamb.

V-Cam hinge requires a minimum 6" wide x 5/16" thick steel channel jamb.